


GPV0369-50



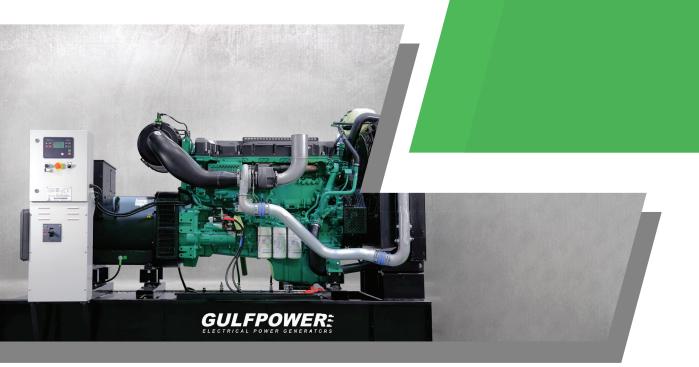

www.gulfpower.com.sa CALL CENTER 920002985

GULFPOWER

GPV0369-50

why GULFPOWER?

• Proudly a Saudi Product

GULFPOWER Generator Set are proudly assembled in Saudi Arabia with the highest quality by being the first Generator Set factory in Saudi Arabia achieving the SASO certificates and supporting the local content in line with the Saudi 2030 Vision.

• Single Source Responsibility


GULFPOWER provides one-source responsibility for the Diesel Generator Sets, Panels (ATS, Sync, MDB), accessories (Fuel systems, Tanks, Cables ... etc.,,), Generator Set rental, Special studies, turnkey installation project And Strong qualified engineers to support you with the best solutions.

• Generator Set designed for the harsh environment

GULFPOWER Generator Set designated to handle the harsh weather in MENA regain specially in Saudi Arabia, GCC and Egypt (hot weather and high humidity)

• Product with our own design

GULFPOWER has its own R&D and engineering team to make the perfect design for Generator Set matching the customer requirements.



50Hz	Standby		Prime	
	kVA	kW	kVA	kW
380 V	346	277	316	253
415 V	347	278	317	254
440 V	349	280	318	254

* The above ratings represent the performance according to conditions specified in ISO 8528/1, ISO 3046/1:1986, and BS5514/1. Derating may be required for conditions outside these; consult GULFPOWER for further info.

Ratings Definition

Emergency standby power (ESP)

Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.

Prime power (PRP)

Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514

* This Generator Set is built in ISO 9001 certified facility



Engine Specification:

Engine Make	Volvo Penta	
Engine Model	TAD1341GE-B	
Engine Speed	1500 RPM	
Max. Gross Power	298KW	
Engine Type	4-Cycle; In-line; 6-Cylinder Diesel	
Aspiration	Turbocharged and Charge Air Cooled	
Bore and Stroke	131 x 158 mm (5.16 x 6.22) inch	
Displacement	12.78 Liter	
Compression Ratio	18.1 : 1	
Wet Weight – Fan to Flywheel Engine (Approximate)	1325 kg	
EXHAUST SYSTEM		
Maximum Back Pressure	10 Kpa	
COOLING SYSTEM		
Jacket Water Circuit Requirements		
Coolant Capacity – Engine only without radiator	20 L	
Standard Thermostat (Modulating Range)	82 - 92 °C	
Maximum Top Tank Temperature	107 °C	
Minimum Pressure Cap	100 kpa	
LUBRICATION SYSTEM		
Oil Capacity with Standard Oil Pan : Low – High	19 – 30 Liter	
Total System Capacity	36 L	
ELECTRICAL SYSTEM:		
Starting Motor	24 Volts	
	Flootropic fuellais stien	
Injection Type	Electronic fuel Injection EMS 2.4	
Fuel Injection Pump Governor	Electronic	
Speed regulation Standards	±0.25% ISO 3046. B\$5514/1	

Alternator Specification:

Make
Model
Туре
Excitation System
Voltage Regulation
Insulation Class
Temperature Rise
Stator Winding
Winding Pitch
IP protection
Overspeed
Bearings
Standards

Stamford S4L1D-E/311 Brushless Self-excited ±1% Class H Class H Double layer LAP 2/3 IP23 125% Single IEC 60034, NEMA MG1





	FUEL CONSUM	PTION		
%	Liter/ hour	US Gal/		

STANDBY POWER					
100	70.30	18.57			
PRIME POWER					
100	63.47	16.77			
75	48.10	12.71			
50	33.39	8.82			

Standard Features

- Lead acid Batteries
- Battery charger.
- Forklift Opening & Crane Lifting Point.
- Digital Controller.
- Anti-Vibration Mounting between Engine/Alternator and skid.

hour

- 3 Pole Circuit Breaker.
- Industrial grade silencer for Open Type set.
- Critical grade silencer for the Close type.

Optional:

- Synchronization Control panel different Varieties.
- Four Pole Circuit Breaker.
- Critical / Hospital Grade Silencer for Open Type Set.
- Annunciator Panel.
- Anti-condensation Heater
- Jacket Water Heater.
- Alternator Winding Temperature Sensor.
- Bearing Temperature Sensor.

DIMENSIONS AND WEIGHT

Canopy Type Dimension: W= 1778, H= 3010, L = 4657mm **Open Set Dimension:** W= 1713, H= 2067, L = 3460 mm Open Type Weight: 36274Kg Canopy Type Weight: 5255 Kg Skid Fuel Tank Capacity: 770L

NOTE: Contact GULFPOWER team for more detailed information about Generator Set dimension.





InteliLiteNT MRS16/AMF8

These controllers are easy to use and

An intuitive user interface with graphic

Log with backed-up real time clock

Troubleshooting even simpler.

- o 3 phase generator protections
- o Power Measurements
- o Event Performance log + RTC
- o Communication Interfaces



InteliGenNT 200

Is a comprehensive controller for both single and multiple gen-sets operating in standby or parallel modes.

- Automatic synchronizing and Power control

- Peak shavingIntegrated PLC programmable functions
- Event based history

* Additional Controlling solution are





